


# Cursor FOR Loops



## What Will I Learn?

In this lesson, you will learn to:

- List and explain the benefits of using cursor `FOR` loops
- Create PL/SQL code to declare a cursor and manipulate it in a `FOR` loop
- Create PL/SQL code containing a cursor `FOR` loop using a subquery

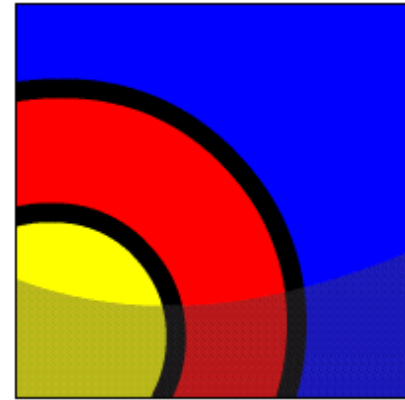



## Why Learn It?


You have already learned how to declare and use a simple explicit cursor, using `DECLARE`, `OPEN`, and `FETCH` in a loop, testing for `%NOTFOUND`, and `CLOSE` statements.



Wouldn't it be easier if you could do all this with just one statement?

You can do all of this using a cursor `FOR` loop.

# Tell Me/Show Me



## Cursor FOR Loops

A cursor FOR loop processes rows in an explicit cursor.

It is a shortcut because the cursor is opened, a row is fetched once for each iteration in the loop, the loop exits when the last row is processed, and the cursor is closed automatically. The loop itself is terminated automatically at the end of the iteration when the last row has been fetched.

Syntax:

```
FOR record_name IN cursor_name LOOP  
    statement1;  
    statement2;  
    . . .  
END LOOP;
```



# Tell Me/Show Me

## Cursor FOR Loops (continued)

In the syntax:

- *record\_name* Is the name of the implicitly declared record (as *cursor\_name*%ROWTYPE)
- *cursor\_name* Is a PL/SQL identifier for the previously declared cursor

```
FOR record_name IN cursor_name LOOP  
    statement1;  
    statement2;  
    . . .  
END LOOP;
```



# Tell Me/Show Me

## Cursor FOR Loops

Note: `v_emp_record` is the record that is implicitly declared. You can access the fetched data with this implicit record as shown in the slide. No variables are declared to hold the fetched data by using the `INTO` clause. The code does not have `OPEN` and `CLOSE` statements to open and close the cursor respectively.

```
DECLARE
  CURSOR emp_cursor IS
    SELECT employee_id, last_name FROM employees
    WHERE department_id =50;
BEGIN
  FOR v_emp_record IN emp_cursor
    LOOP
      DBMS_OUTPUT.PUT_LINE(v_emp_record.employee_id
                           || ' ' || v_emp_record.last_name);
    END LOOP;
END;
```



# Tell Me/Show Me

## Cursor FOR Loops

Compare the cursor FOR loop code with the expanded code you learned in the previous lesson. The two forms of the code are logically identical to each other and produce exactly the same results.

```
DECLARE
  CURSOR emp_cursor IS
    SELECT employee_id, last_name
    FROM employees
    WHERE department_id =50;
BEGIN
  FOR v_emp_record IN emp_cursor
    LOOP
      DBMS_OUTPUT.PUT_LINE(...);
    END LOOP;
END;
```

```
DECLARE
  CURSOR emp_cursor IS
    SELECT employee_id, last_name
    FROM employees
    WHERE department_id =50;
  v_emp_record emp_cursor%ROWTYPE;
BEGIN
  OPEN emp_cursor;
  LOOP
    FETCH emp_cursor INTO
      v_emp_record;
    EXIT WHEN emp_cursor%NOTFOUND;
    DBMS_OUTPUT.PUT_LINE(...);
  END LOOP;
  CLOSE emp_cursor;
END;
```



# Tell Me/Show Me

## Cursor FOR Loops: A Second Example

```
DECLARE
  CURSOR dept_cursor IS
    SELECT department_id, department_name
      FROM departments
     ORDER BY department_id;
BEGIN
  FOR v_dept_record IN dept_cursor
  LOOP
    DBMS_OUTPUT.PUT_LINE( v_dept_record.department_id
                          || ' ' || v_dept_record.department_name );
  END LOOP;
END;
```

v\_dept\_record has been implicitly declared as dept\_cursor%ROWTYPE. How many fields does it contain?





# Tell Me/Show Me

## Guidelines for Cursor FOR Loops

- Do not declare the record that controls the loop because it is declared implicitly.
- The scope of the implicit record is restricted to the loop, so you cannot reference the record outside the loop.
- You can access fetched data by *record\_name.column\_name*.



# Tell Me/Show Me

## Testing Cursor Attributes

You can still test cursor attributes, such as %ROWCOUNT. This example exits from the loop after five rows have been fetched and processed. The cursor is still closed automatically.

```
DECLARE
  CURSOR emp_cursor IS
    SELECT employee_id, last_name FROM employees;

BEGIN
  FOR v_emp_record IN emp_cursor
  LOOP
    EXIT WHEN emp_cursor%ROWCOUNT > 5;
    DBMS_OUTPUT.PUT_LINE( v_emp_record.employee_id
                          || ' ' || v_emp_record.last_name);
  END LOOP;
END;
```



## Tell Me/Show Me

### Cursor FOR Loops Using Subqueries

You can go one step further. You don't have to declare the cursor at all! Instead, you can specify the `SELECT` on which the cursor is based directly in the `FOR` loop.

The advantage of this is that all the cursor definition is contained in a single `FOR ...` statement. This makes later changes to the code much easier and quicker.

The next slide shows an example.



# Tell Me/Show Me

## Cursor FOR Loops Using Subqueries: Example

```
BEGIN
  FOR v_emp_record IN (SELECT employee_id, last_name
                        FROM employees WHERE department_id =50)
  LOOP
    DBMS_OUTPUT.PUT_LINE(v_emp_record.employee_id
                          || ' ' || v_emp_record.last_name);
  END LOOP;
END;
```

The `SELECT` clause in the `FOR` statement is technically a subquery, so you must enclose it in parentheses.



# Tell Me/Show Me

## Cursor FOR Loops Using Subqueries (continued)

Again, compare these two forms of the code. They are logically identical. But which one would you rather write – especially if you hate typing!

```
BEGIN
  FOR v_dept_rec IN (SELECT *
                     FROM departments)
  LOOP
    DBMS_OUTPUT.PUT_LINE(...);
  END LOOP;
END;
```


```
DECLARE
  CURSOR dept_cursor IS
    SELECT * FROM departments;
  v_dept_rec  dept_cursor%ROWTYPE;
BEGIN
  OPEN dept_cursor;
  LOOP
    FETCH dept_cursor INTO
      v_dept_rec;
    EXIT WHEN dept_cursor%NOTFOUND;
    DBMS_OUTPUT.PUT_LINE(...);
  END LOOP;
  CLOSE dept_cursor;
END;
```

## Tell Me/Show Me

### Terminology

Key terms used in this lesson include:


Cursor FOR loop



## Summary

In this lesson, you learned to:

- List and explain the benefits of using cursor `FOR` loops
- Create PL/SQL code to declare a cursor and manipulate it in a `FOR` loop
- Create PL/SQL code containing a cursor `FOR` loop using a subquery

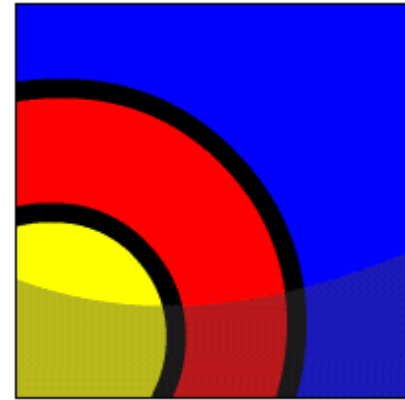



## Try It/Solve It

The exercises in this lesson cover the following topics:

- Listing and explaining the benefits of using cursor FOR loops
- Creating PL/SQL code to declare a cursor and manipulate it in a FOR loop
- Creating PL/SQL code containing a cursor FOR loop using a subquery

